



## Specifications Citrus Plus Mastic Remover

### 5 gallon Pail and 55 Gallon Drum


Appearance:	Clear
Odor:	Slight Citrus
Boiling Point:	390—145 F
Freezing Point:	-94 F
Vapor Density:	NA
pH:	NP
Flash Point:	>145 F (TCC)
DOT Shipping Class::	70
Shipping Weight:	5 gal. pail 37 lbs. 55 gal. drum 417 lbs.
Specific Gravity:	0.800 - 0.820
Solubility in Water:	Nil
Coverage Rate:	Up to 150 sq ft per gallon
Reactivity:	Stable
HFIS Rating:	1-2-0
Shelf Life:	None
NMFC#:	48580

DOT Shipping Name: Not DOT Regulated  
on containers less than 120 gallons

**Twin-Chemicals**  
**Atlanta, Georgia**

**(800) 442-4958**  
**(770) 924-6147 fax**

**www.twinchemicals.com**

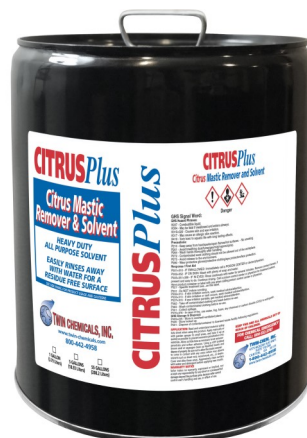

Citrus Plus is a powerful low odor mastic remover with a hint of citrus odor. It is formulated to give you the high square foot coverage expected from a high performance product, but will emulsify in water for easy clean up. The slight and pleasing citrus odor coupled with the high performance makes Citrus Plus an easy choice for your everyday mastic remover needs.

#### Directions:

1. Read and understand the safety data sheet (SDS) when using this product.
2. Prepare a safe work area. Using plastic sheeting, cover walls, windows, air vents, drains, cracks, carpeting, woodwork and any other porous materials that may come in contact with the mastic remover. Set up decontamination chambers and a negative air system.
3. Remove floor tile according to local and federal regulations.
4. Apply **Citrus Plus** Mastic Remover to the defined areas, either manually or with a pump sprayer until areas are completely saturated. Do not let the mastic remover splash onto any porous areas (drywall, wood, etc). Agitate the product with a stiff bristled broom or brush.
5. Allow the mastic remover to penetrate and soften the adhesive for at least 20-30 minutes. Some mastic may require a longer dwell time.
6. After the mastic has dissolved, use a squeegee to collect liquefied mastic into a pile and use **Mastasorb Absorbent** bales to soak up liquid. Dispose waste according to local and federal regulations.
7. Once the adhesives have been satisfactorily removed, use a wetting agent, **Pronto Extra Wetter**, to wet out any remaining particles to make certain they don't become airborne.
8. The final step is to use a heavy-duty degreaser, **DeSolv Degreaser**, to remove residual mastic remover from the substrate and to speed up the time between mastic removal and resurfacing. The degreaser is applied straight and scrubbed into the surface as water is added, with agitation, to 'float' the solvent out of the substrate.
9. Allow the surface to dry a minimum of 48-72 hours before applying new mastic and/or new flooring.

**WARRANTY NOTICE:** Seller makes no warranty, expressed or implied, nor accepts any responsibility for any direct or consequential damages beyond the purchase price, because seller cannot control users handling and use, or effect of use.